

Technical datasheet

Recon-M-750



Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.



LED

220-240V  
50-60Hz

IP66

CCT  
5000 k


CRI  
70+

Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Connection cable       |
| IP rating             | 66                     |
| Protection class      | I                      |
| Ambient temperature   | -30 to +35 °C          |
| Light source          | LED                    |
| Colour temperature    | 5000k                  |
| Color rendering index | 70                     |
| Rated luminous flux   | 7,170 lm               |
| Connected load        | 48.95 W                |
| Luminous efficacy     | 146.5 lm/W             |

|                            |                    |
|----------------------------|--------------------|
| Inrush current             | 90 A               |
| Optical system             | Lenses             |
| Optical part material      | Hardened glass     |
| Housing material           | Die-cast aluminium |
| Surface finish             | Powder coated      |
| Width                      | 243.00 cm          |
| Height                     | 53.00 cm           |
| Length                     | 280.00 cm          |
| Weight                     | 1.55 kg            |
| Service lifetime (L80 B10) | 35 000 h           |
| Warranty                   | 3 years            |

Dimensions



Light distribution

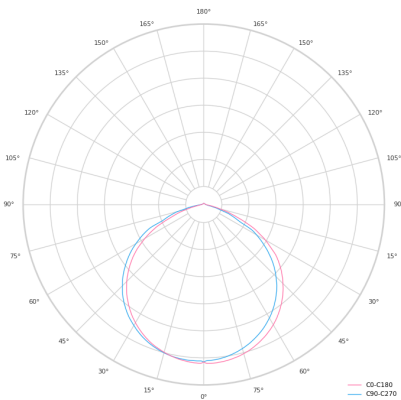

Optional products

Recon sensor

