


Technical datasheet

SQEA-S-830-1

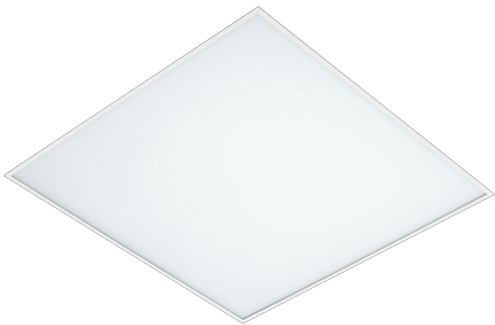

Product description

Square easy is a 595x595 mm LED panel with state-of-the-art LED technology and LED source with 50,000 hours lifetime. Available in 3 power options, color temperatures 3000K/4000K with CRI 80+. Steel body with PMMA diffuser for optimal light distribution and DALI control option available. Fully compatible with existing lighting infrastructure. Ideal for offices, halls and commercial spaces. 5-year warranty.

LED

220-240 V
50-60 Hz

IP20

UGR
< 19


CCT
3000 k

CRI
80+


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Plug-in terminal	Optical part material	PMMA
Dimming type	Non-dimmable	Housing material	Steel
		Surface finish	Powder coated
IP rating	20	Service lifetime (L80 B10)	50 000 h
Protection class	II	Warranty	5 years
Ambient temperature	0 to +30 °C		
Light source	LED		
Colour temperature	3000k		
Color rendering index	80		
Rated luminous flux	3,520 lm		
Connected load	22.00 W		
Luminous efficacy	160.0 lm/W		

Dimensions

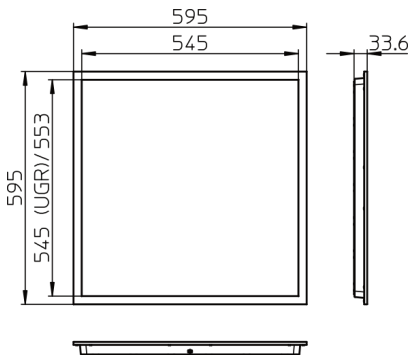

Light distribution

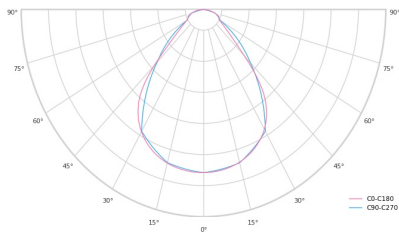

Optional products



Square Easy
frame

Square springs
Code: SQ Springs

Square
suspension kit