


Technical datasheet

LINESUS2258-L-840-2-WH-DI-



Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V
50-60Hz

IP20


CCT
4000 k

CRI
80+


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	DALI address	1
Dimming type	DALI	Standby power	0.50 W
IP rating	20	Inrush current	53 A
Protection class	I	Optical system	Diffuser
Ambient temperature	0 to +25 °C	Optical part material	PMMA
Light source	LED	Housing material	Aluminium
Colour temperature	4000k	Surface finish	Powder coated
Color rendering index	80	Width	50.00 cm
Rated luminous flux	5,912 lm	Height	70.00 cm
Connected load	59.55 W	Length	2,258.00 cm
Luminous efficacy	99.3 lm/W	Weight	5.50 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

Dimensions

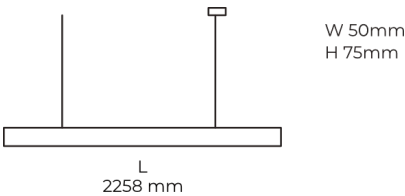

Light distribution

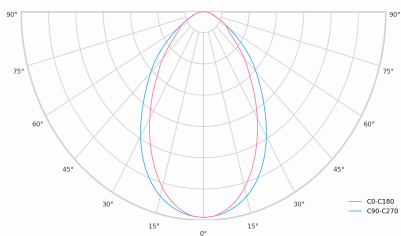

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z