

# Technical datasheet

## IP65-1500-M-850-1



### Product description

Led linear luminaire for dusty environments with IP65 protection and 5 year warranty.



LED


220-240V  
50-60Hz

IP65

### Product technical data

|                     |                        |                            |             |
|---------------------|------------------------|----------------------------|-------------|
| Mains voltage       | 220 - 240V AC, 50/60Hz | Inrush current             | 24 A        |
| Dimming type        | Non-dimmable           | Inrush time                | 220 µs      |
| IP rating           | 65                     | Optical system             | Diffuser    |
| Protection class    | I                      | Optical part material      | PC          |
| Impact rating       | IK 08                  | Housing material           | Plastic     |
| Ambient temperature | -20 to +40 °C          |                            |             |
| Light source        | LED                    | Width                      | 74.00 cm    |
| Rated luminous flux | 8,128 lm               | Height                     | 64.00 cm    |
| Connected load      | 58.30 W                | Length                     | 1,502.00 cm |
| Luminous efficacy   | 139.4 lm/W             | Weight                     | 1.70 kg     |
|                     |                        | Service lifetime (L80 B10) | 50 000 h    |
|                     |                        | Warranty                   | 5 years     |

### Dimensions

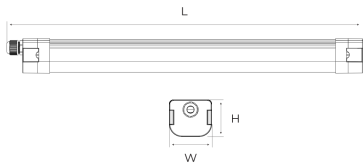

### Light distribution

