

Technical datasheet

Ring-L-830-2-SUR-WH-



Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V
50-60Hz

IP20


CCT
3000 k

CRI
80+


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Screw terminal	Optical part material	PMMA
Dimming type	DALI	Housing material	Aluminium
IP rating	20	Surface finish	Painted
Protection class	I	Height	60.00 cm
Ambient temperature	0 to +25 °C	Diameter	1,200.00 cm
Light source	LED	Weight	12.20 kg
Colour temperature	3000k	Service lifetime (L80 B10)	50 000 h
Color rendering index	80	Warranty	5 years
Rated luminous flux	6,600 lm		
Connected load	75.00 W		
Luminous efficacy	88.0 lm/W		

Dimensions

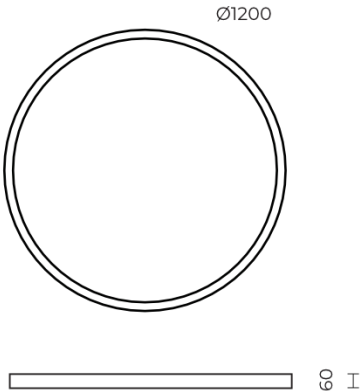

Light distribution

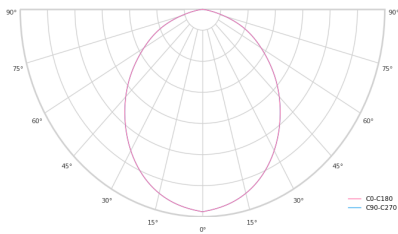

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z