

# Technical datasheet

## Ring-L-840-1-SUS-WH-



### Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V  
50-60Hz

IP20


CCT  
4000 k

CRI  
80+


### Product technical data

|                       |                        |                            |             |
|-----------------------|------------------------|----------------------------|-------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Optical system             | Diffuser    |
| Connection method     | Screw terminal         | Optical part material      | PMMA        |
| Dimming type          | Non-dimmable           | Housing material           | Aluminium   |
|                       |                        | Surface finish             | Painted     |
| IP rating             | 20                     | Height                     | 60.00 cm    |
| Protection class      | I                      | Diameter                   | 1,200.00 cm |
| Ambient temperature   | 0 to +25 °C            | Weight                     | 12.20 kg    |
| Light source          | LED                    | Service lifetime (L80 B10) | 50 000 h    |
| Colour temperature    | 4000k                  | Warranty                   | 5 years     |
| Color rendering index | 80                     |                            |             |
| Rated luminous flux   | 7,125 lm               |                            |             |
| Connected load        | 75.00 W                |                            |             |
| Luminous efficacy     | 95.0 lm/W              |                            |             |

### Dimensions

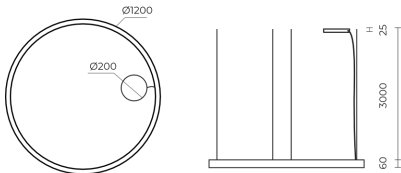

### Light distribution

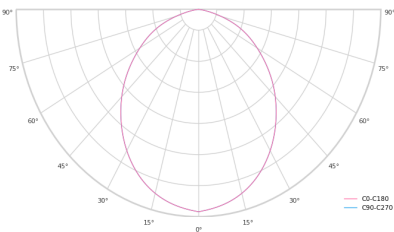

Available cable colors

