


Technical datasheet

BASICSUS-1200-840-1-PD-BL

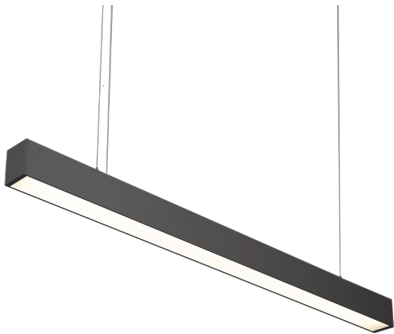

Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.

LED

220-240V
50-60Hz

IP20

CCT
4000 k

CRI
80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Lenses
Connection method	Plug-in terminal	Optical part material	PC
Dimming type	Non-dimmable	Housing material	Aluminium
		Surface finish	Powder coated
IP rating	20	Width	50.00 cm
Protection class	I	Height	70.00 cm
Ambient temperature	0 to +25 °C	Length	1,200.00 cm
Light source	LED	Weight	1.70 kg
Colour temperature	4000k	Service lifetime (L80 B30)	50 000 h
Color rendering index	80	Warranty	3 years
Rated luminous flux	3,182 lm		
Connected load	26.60 W		
Luminous efficacy	119.6 lm/W		

Dimensions



l 1200 mm
w 50 mm
h 73 mm

Light distribution

