


Technical datasheet

HEXSUS-600-L-930-1-WH-

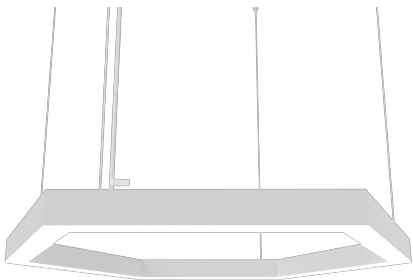

Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED

220-240V  
50-60Hz

IP20

CE

CCT  
3000 k


CRI  
90+

Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Plug-in terminal       |
| Dimming type          | Non-dimmable           |
| IP rating             | 20                     |
| Protection class      | I                      |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 3000k                  |
| Color rendering index | 90                     |
| Rated luminous flux   | 4,396 lm               |
| Connected load        | 56.90 W                |
| Luminous efficacy     | 77.3 lm/W              |

|                            |               |
|----------------------------|---------------|
| Ripple                     | 1 %           |
| Inrush current             | 37 A          |
| Inrush time                | 188 µs        |
| Optical system             | Diffuser      |
| Optical part material      | PMMA          |
| Housing material           | Aluminium     |
| Surface finish             | Powder coated |
| Width                      | 600.00 cm     |
| Height                     | 70.00 cm      |
| Length                     | 600.00 cm     |
| Weight                     | 5.40 kg       |
| Service lifetime (L80 B10) | 50 000 h      |
| Warranty                   | 5 years       |

Dimensions



Light distribution

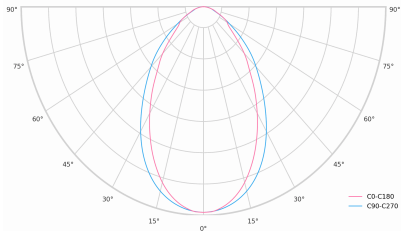

Available cable colors

