

# Technical datasheet

## WORSUS-M-940-1-WAS-BL-



### Product description


Worker suspended is a suspended linear LED luminaire with LED source with 50,000 hours lifetime. Available in 4 power options, color temperatures 3000K/4000K/5000K with CRI 80+/90+. Four light distribution types (50°, 80°, SYM, WAS) with special optics reducing glare and DALI control option available. Wide range of cable colors. Provides comfortable and natural lighting with excellent parameters. Ideal for offices and stores. 5-year warranty.

**LED** 220-240V 50-60Hz **IP20**   **UGR < 19** **CCT 4000 k** **CRI 90+**


### Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Ripple                     | 1 %           |
| Connection method     | Plug-in terminal       | Inrush current             | 17 A          |
| Dimming type          | Non-dimmable           | Inrush time                | 162 µs        |
| IP rating             | 20                     | Optical system             | Lenses        |
| Protection class      | I                      | Optical part material      | PMMA          |
| Ambient temperature   | 0 to +25 °C            | Housing material           | Aluminium     |
| Light source          | LED                    | Surface finish             | Powder coated |
| Colour temperature    | 4000k                  | Width                      | 44.00 cm      |
| Color rendering index | 90                     | Height                     | 47.00 cm      |
| Rated luminous flux   | 3,482 lm               | Length                     | 1,122.00 cm   |
| Connected load        | 31.83 W                | Weight                     | 2.80 kg       |
| Luminous efficacy     | 109.4 lm/W             | Service lifetime (L80 B10) | 50 000 h      |
|                       |                        | Warranty                   | 5 years       |

### Dimensions

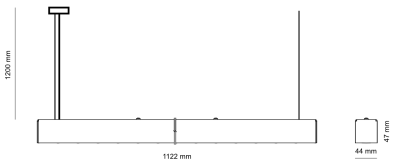

### Light distribution

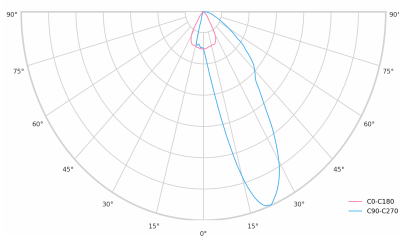

Available cable colors

