

Family datasheet

LINE Surface



Product description

LINE Surface is an elegant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. DALI control option available. Ideal for offices and commercial spaces. 5-year warranty.

LED


220-240V
50-60Hz

IP20


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	3-phase track adapter	Optical part material	PMMA
IP rating	20	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Light source	LED	Ambient temperature	0 to +25°C
Switching type	Non-dimmable, DALI	Service lifetime (L80 B10)	50 000h
CRI	80, 90	Warranty	5 years
CCT	3000K, 4000K		
Lumen output	621-7389 lm		
Efficiency	Up to 107 lm/W		
Power consumption	8-79 W		

Dimensions

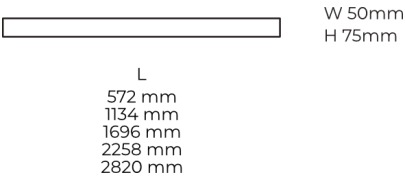

Light distribution curves



Available housing colors



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **LINESUR-1134-L-830-1-BL**

Attribute	Value	Code
Model	LINE Surface	LINESUR-
Size	572	572
	1134	1134
	1696	1696
	2258	2258
	2820	2820
Version	S	S
	M	M
	L	L
	XL	XL
CCT	3000k (CRI 80+)	830
	3000k (CRI 90+)	930
	4000k (CRI 80+)	840
	4000k (CRI 90+)	940
Dimming	Non-dimmable	1
	DALI	2
Housing Color	Black	BL
	White	WH