


Family datasheet

Basic Surface

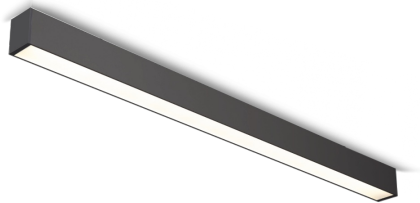

Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.

LED

220-240V
50-60Hz

IP20






Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Plug-in terminal	Optical part material	PC
IP rating	20	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Light source	LED	Ambient temperature	0 to +25°C
Switching type	Non-dimmable, DALI	Service lifetime (L80 B30)	50 000h
CRI	80	Warranty	3 years
CCT	4000K		
Lumen output	3181-3895 lm		
Efficiency	Up to 123 lm/W		
Power consumption	26-31 W		

Dimensions

1200		l 1200 mm w 50 mm h 73 mm
1500		l 1500 mm w 50 mm h 73 mm

Light distribution curves



Available housing colors



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **BASICSUR-1200-840-1-PD-BL**

Attribute	Value	Code
Model	Basic Surface	BASICSUR-
Size	1200	1200
	1500	1500
CCT	4000k (CRI 80+)	840
Dimming	Non-dimmable	1
	DALI	2
Light distribution	Prismatic diffuser	PD
Housing Color	Black	BL
	White	WH