

# Technical datasheet

## DIABLO-M-940-2-24-BL



### Product description

Diablo is a compact 3-phase LED spotlight with integrated power supply and aluminum heatsink with 50,000 hours lifetime. Available in 3 power options, wide range of color temperatures (2700K-4000K) with CRI 80+/90+. Four light distribution types (15°, 24°, 36°, 60°) and DALI control option available. Ideal for commercial spaces, showrooms and households. 5-year warranty.

LED

220-240V  
50-60Hz

IP20

CCT  
4000 k


CRI  
90+

### Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | 3-phase track adapter  |
| Dimming type          | DALI                   |
| IP rating             | 20                     |
| Protection class      | II                     |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 4000k                  |
| Color rendering index | 90                     |
| Rated luminous flux   | 2,546 lm               |
| Connected load        | 19.60 W                |
| Luminous efficacy     | 129.9 lm/W             |

|                            |                    |
|----------------------------|--------------------|
| Ripple                     | 3 %                |
| DALI address               | 1                  |
| Standby power              | 0.50 W             |
| Inrush current             | 5 A                |
| Inrush time                | 50 µs              |
| Optical system             | Lenses             |
| Optical part material      | PMMA               |
| Housing material           | Die-cast aluminium |
| Surface finish             | Powder coated      |
| Height                     | 132.00 cm          |
| Diameter                   | 90.00 cm           |
| Weight                     | 0.80 kg            |
| Service lifetime (L80 B10) | 50 000 h           |
| Warranty                   | 5 years            |

### Dimensions

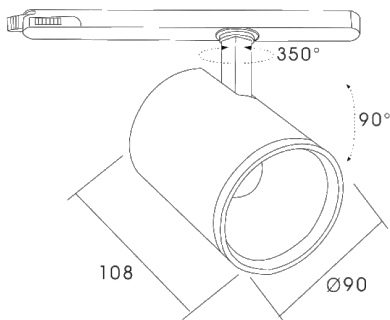

### Light distribution

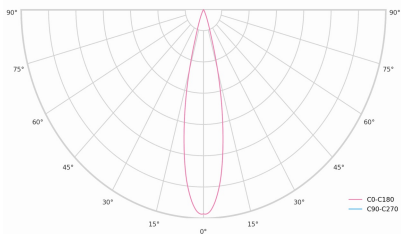

Optional products



DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

- Key DALI2 innovations:
- Advanced diagnostic capabilities
  - Better fault reporting and device status
  - Enhanced scene programming options
  - Support for RGB/RGBW and tunable white