

Technical datasheet

Recon-M-740



Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.



LED

220-240V
50-60Hz

IP66

CE

CCT
4000 k


CRI
70+

Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	66
Protection class	I
Ambient temperature	-30 to +35 °C
Light source	LED
Colour temperature	4000k
Color rendering index	70
Rated luminous flux	7,170 lm
Connected load	48.95 W
Luminous efficacy	146.5 lm/W

Inrush current	90 A
Optical system	Lenses
Optical part material	Hardened glass
Housing material	Die-cast aluminium
Surface finish	Powder coated
Width	243.00 cm
Height	53.00 cm
Length	280.00 cm
Weight	1.55 kg
Service lifetime (L80 B10)	35 000 h
Warranty	3 years

Dimensions



Light distribution

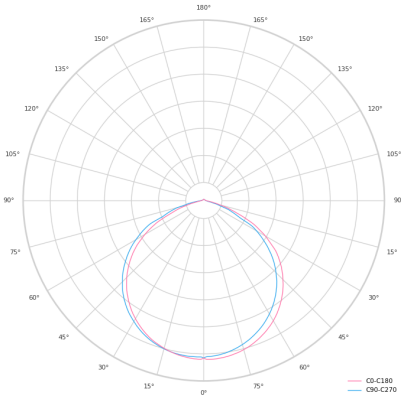

Optional products

Recon sensor

