

Technical datasheet

LINESUS2258-XL-830-2-BL-DI/IND-



Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V  
50-60Hz

IP20

CCT  
3000 k


CRI  
80+

Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Plug-in terminal       |
| Dimming type          | DALI                   |
| IP rating             | 20                     |
| Protection class      | I                      |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 3000k                  |
| Color rendering index | 80                     |
| Rated luminous flux   | 6,925 lm               |
| Connected load        | 117.90 W               |
| Luminous efficacy     | 98.2 lm/W              |

|                            |               |
|----------------------------|---------------|
| Ripple                     | 1 %           |
| DALI address               | 2             |
| Standby power              | 1.00 W        |
| Inrush current             | 71 A          |
| Inrush time                | 180 µs        |
| Optical system             | Diffuser      |
| Optical part material      | PMMA          |
| Housing material           | Aluminium     |
| Surface finish             | Powder coated |
| Width                      | 50.00 cm      |
| Height                     | 70.00 cm      |
| Length                     | 2,258.00 cm   |
| Weight                     | 5.50 kg       |
| Service lifetime (L80 B10) | 50 000 h      |
| Warranty                   | 5 years       |

Dimensions

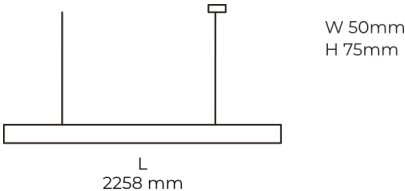

Light distribution

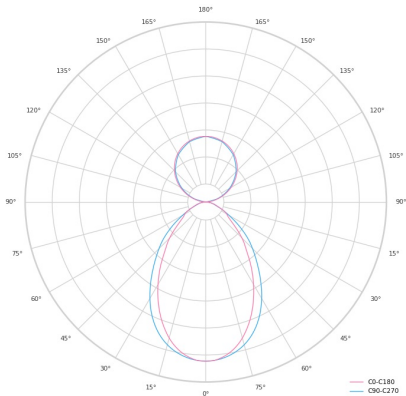

Available cable colors

