


Technical datasheet

LINESUS2258-XL-840-1-WH-DI/IND-



Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V
50-60Hz

IP20


CCT
4000 k

CRI
80+


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	2 %
Connection method	Plug-in terminal	Inrush current	35 A
Dimming type	Non-dimmable	Inrush time	162 µs
IP rating	20	Optical system	Diffuser
Protection class	I	Optical part material	PMMA
Ambient temperature	0 to +25 °C	Housing material	Aluminium
Light source	LED	Surface finish	Powder coated
Colour temperature	4000k	Width	50.00 cm
Color rendering index	80	Height	70.00 cm
Rated luminous flux	7,275 lm	Length	2,258.00 cm
Connected load	114.94 W	Weight	5.50 kg
Luminous efficacy	105.8 lm/W	Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

Dimensions

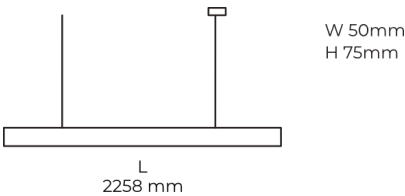

Light distribution

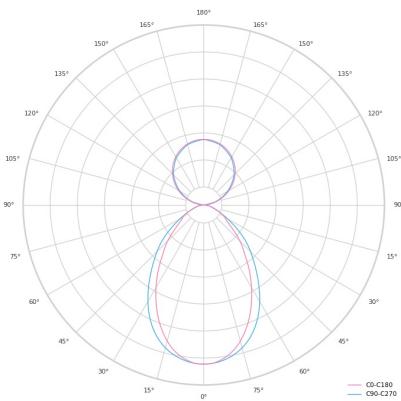

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z