

Technical datasheet

Ring-M-830-1-SUR-BL-



Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED

220-240V
50-60Hz

IP20

CCT
3000 k


CRI
80+

Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
Dimming type	Non-dimmable
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	80
Rated luminous flux	5,016 lm
Connected load	57.00 W
Luminous efficacy	88.0 lm/W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Painted
Height	60.00 cm
Diameter	900.00 cm
Weight	7.80 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

Dimensions

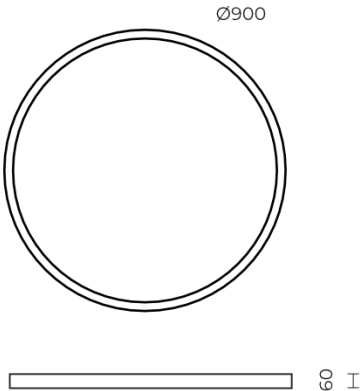

Light distribution

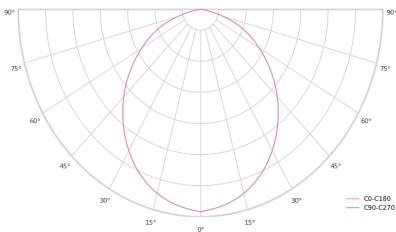

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z