

Technical datasheet

BASICSUS-1200-840-2-PD-WH



Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.

LED

220-240V  
50-60Hz

IP20


CCT  
4000 k

CRI  
80+

Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Optical system             | Lenses        |
| Connection method     | Plug-in terminal       | Optical part material      | PC            |
| Dimming type          | DALI                   | Housing material           | Aluminium     |
|                       |                        | Surface finish             | Powder coated |
| IP rating             | 20                     | Width                      | 50.00 cm      |
| Protection class      | I                      | Height                     | 70.00 cm      |
| Ambient temperature   | 0 to +25 °C            | Length                     | 1,200.00 cm   |
|                       |                        | Weight                     | 1.70 kg       |
| Light source          | LED                    | Service lifetime (L80 B30) | 50 000 h      |
| Colour temperature    | 4000k                  | Warranty                   | 3 years       |
| Color rendering index | 80                     |                            |               |
| Rated luminous flux   | 3,182 lm               |                            |               |
| Connected load        | 26.60 W                |                            |               |
| Luminous efficacy     | 119.6 lm/W             |                            |               |

Dimensions

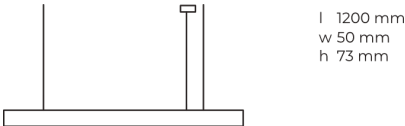

Light distribution

