

# Technical datasheet

## STYSUS-500-840-1-WH-



### Product description

Stanley Suspended is a large pendant LED luminaire with high-quality LED source with 50,000 hours lifetime. Available in 5 sizes (500-1200mm), color temperature 4000K with CRI 80+. Pendant mounting with DALI control option available. Wide range of cable colors. High luminous flux up to 12,169 lm. Ideal for offices and large commercial spaces. 5-year warranty.



LED

220-240V  
50-60Hz

IP20


CCT  
4000 k

CRI  
80+


### Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Optical system             | Diffuser      |
| Connection method     | Plug-in terminal       | Optical part material      | PC            |
| Dimming type          | Non-dimmable           | Housing material           | Steel         |
|                       |                        | Surface finish             | Powder coated |
| IP rating             | 20                     | Height                     | 100.00 cm     |
| Protection class      | I                      | Diameter                   | 500.00 cm     |
| Ambient temperature   | 0 to +25 °C            | Weight                     | 4.30 kg       |
| Light source          | LED                    | Service lifetime (L80 B10) | 50 000 h      |
| Colour temperature    | 4000k                  | Warranty                   | 5 years       |
| Color rendering index | 80                     |                            |               |
| Rated luminous flux   | 3,042 lm               |                            |               |
| Connected load        | 40.00 W                |                            |               |
| Luminous efficacy     | 76.1 lm/W              |                            |               |

### Dimensions



### Light distribution

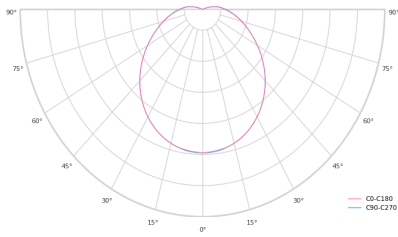

Available cable colors

