


Technical datasheet

HEXSUS-600-L-940-1-WH-

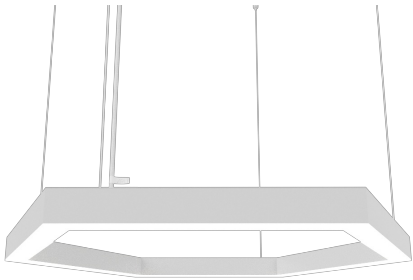

Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED

220-240V
50-60Hz

IP20

CE


CCT
4000 k

CRI
90+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	Inrush current	37 A
Dimming type	Non-dimmable	Inrush time	188 µs
IP rating	20	Optical system	Diffuser
Protection class	I	Optical part material	PMMA
Ambient temperature	0 to +25 °C	Housing material	Aluminium
Light source	LED	Surface finish	Powder coated
Colour temperature	4000k	Width	600.00 cm
Color rendering index	90	Height	70.00 cm
Rated luminous flux	4,700 lm	Length	600.00 cm
Connected load	56.90 W	Weight	5.40 kg
Luminous efficacy	82.6 lm/W	Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

Dimensions



Light distribution



Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z