

Technical datasheet

HEXSUS-1800-M-940-1-BL-



Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED

220-240V
50-60Hz

IP20

CCT
4000 k


CRI
90+

Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	Non-dimmable
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	4000k
Color rendering index	90
Rated luminous flux	5,384 lm
Connected load	58.35 W
Luminous efficacy	92.3 lm/W

Ripple	2 %
Inrush current	18 A
Inrush time	44 µs
Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Width	1,800.00 cm
Height	70.00 cm
Length	1,800.00 cm
Weight	10.00 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

Dimensions



Light distribution

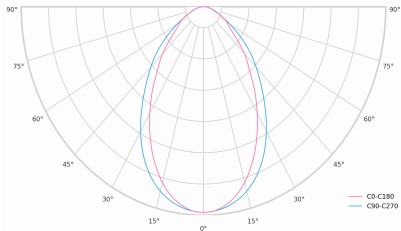

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z