

# Technical datasheet

## DL-S-840-1



### Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage



LED

220-240V  
50-60Hz

IP20


CCT  
4000 k

CRI  
80+

### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Screw terminal	Optical part material	PMMA
Dimming type	Non-dimmable	Housing material	Aluminium
IP rating	20	Surface finish	Powder coated
Protection class	II		
Ambient temperature	0 to +25 °C	Service lifetime (L70 B50)	30 000 h
Light source	LED	Warranty	2 years
Colour temperature	4000k		
Color rendering index	80		
Rated luminous flux	1,950 lm		
Connected load	17.00 W		
Luminous efficacy	114.7 lm/W		

### Dimensions

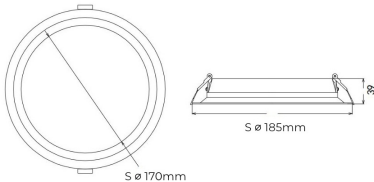

### Light distribution

