

# Family datasheet

## Recon



### Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.



LED


220-240V  
50-60Hz

IP66


### Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Lenses
Connection method	Connection cable	Optical part material	Hardened glass
IP rating	66	Housing material	Die-cast aluminium
Protection class	I	Surface finish	Powder coated
Light source	LED	Ambient temperature	-30 to +35°C
CRI	70	Service lifetime (L80 B10)	35 000h
CCT	4000K, 5000K	Warranty	3 years
Lumen output	4138-7170 lm		
Efficiency	Up to 146 lm/W		
Power consumption	28-48 W		

### Dimensions

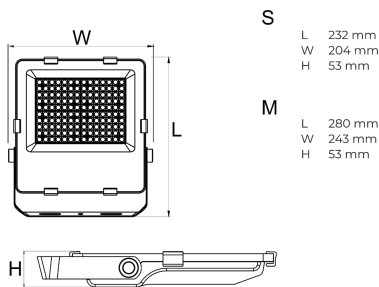

### Light distribution curves



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **Recon-M-740**

Attribute	Value	Code
Model	Recon	Recon-
Version	S	S
	M	M
CCT	4000k (CRI 70+)	740
	5000k (CRI 70+)	750

Optional products

Recon sensor

