

Family datasheet

Area G3



Product description

Area G3 is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.

LED


220-240V
50-60Hz

IP66


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Lenses
Connection method	Connection cable	Optical part material	Hardened glass
IP rating	66	Housing material	Die-cast aluminium
Protection class	I	Surface finish	Powder coated
Impact rating	IK 08	Ambient temperature	-30 to +35°C
Light source	LED	Service lifetime (L80 B10)	50 000h
Switching type	Non-dimmable, DALI	Warranty	5 years
CRI	80		
CCT	4000K, 5000K		
Lumen output	14088-35289 lm		
Efficiency	Up to 176 lm/W		
Power consumption	100-200 W		

Dimensions



Light distribution curves

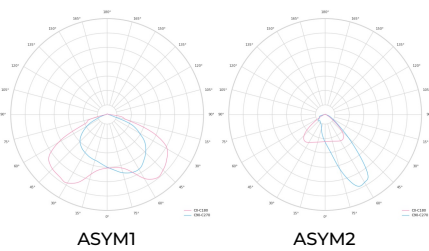

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **AREA-L-840-1-ASYM2**

Attribute	Value	Code
Model	Area G3	AREA-
Version	S	S
	M	M
	L	L
CCT	4000k (CRI 80+)	840
	5000k (CRI 80+)	850
Dimming	Non-dimmable	1
	DALI	2
Light distribution	ASYM1	ASYM1
	ASYM2	ASYM2