

Technical datasheet

HEXSUR-1800-S-830-2-BL



Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED

220-240V
50-60Hz

IP20

CCT
3000 k

CRI
80+


DIMM
Push

CLO


Product technical data

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Ripple | 1 % |
| Connection method | Plug-in terminal | DALI address | 1 |
| Dimming type | DALI | Standby power | 0.50 W |
| IP rating | 20 | Inrush current | 18 A |
| Protection class | I | Inrush time | 180 µs |
| Ambient temperature | 0 to +25 °C | Optical system | Diffuser |
| Light source | LED | Optical part material | PMMA |
| Colour temperature | 3000k | Housing material | Aluminium |
| Color rendering index | 80 | Surface finish | Powder coated |
| Rated luminous flux | 4,863 lm | Width | 1,800.00 cm |
| Connected load | 49.53 W | Height | 70.00 cm |
| Luminous efficacy | 98.2 lm/W | Length | 1,800.00 cm |
| | | Weight | 10.00 kg |
| | | Service lifetime (L80 B10) | 50 000 h |
| | | Warranty | 5 years |

Dimensions

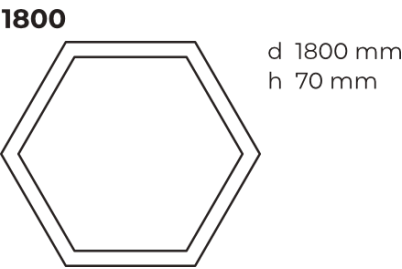


Light distribution

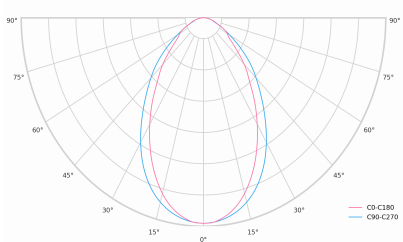

Constant Light Output (CLO)

This system compensates for the depreciation of luminousflux to avoid excess lightingat the beginningof the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lightinglevel duringthe luminaire's usefullife.

Without a CLO feature, this simply means increasingthe initial power upon installationin order tomake up for luminous depreciation. By precisely controlling the luminous flux,the energy needed to reach the required level can be maintained throughout the luminaire's life.

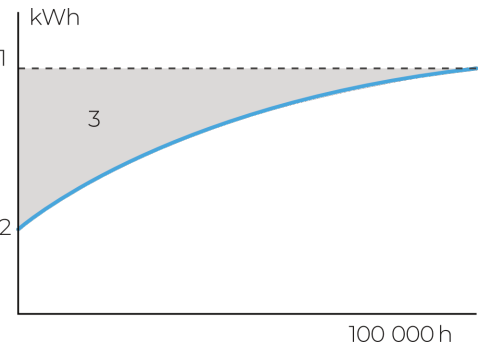

A. Dimming level
B. Time

DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

- Key DALI2 innovations:**
- Advanced diagnostic capabilities
 - Better fault reporting and device status
 - Enhanced scene programming options
 - Support for RGB/RGBW and tunable white